


ENCLOSED HOUSING SLEWING DRIVE 围栏型回转驱动装置

围栏型回转驱动装置主要应用在使用工况要求相对较高的情况下，如对回转结构部分防尘、防雨、防腐蚀等要求较高场合，IP等级达到IP65。
Enclosed housing slewing drive mainly apply to the relatively high condition for high requirement for dustproof, rain-proof and anti-corrosion occasion. Presion grade IP65.

For detailed drawing, please contact us
详细图纸请联系我们

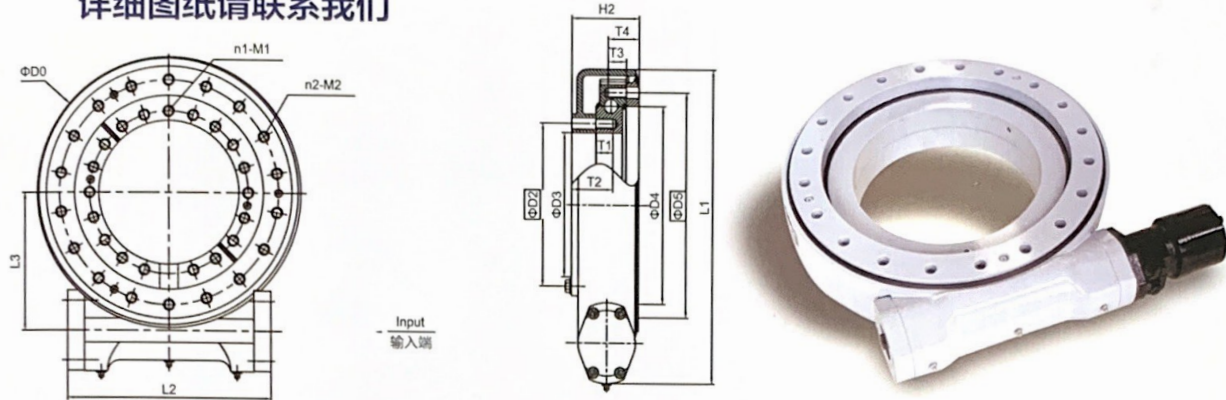

尺寸参数表 : DIMENSIONS PARAMETERS

型号 Model	外形尺寸 External Dimensions					安装尺寸 Installation Dimensions				安装孔参数 Mounting Hole Data							
	L1	L2	L3	H2	D0	D2	D3	D4	D5	n1	M1	T1	T2	n2	M2	T3	T4
	mm									内圈 Inner Ring				外圈 Outer Ring			
SE3	190	160.5	80	109	152	100	no	no	100	6	M10	17	32	6	M10	22	no
SE5	219.2	170.5	93.7	80	183	70	50	103.5	135	(8-1)	M10	20	42	6	M10	20	39
SE7	295.7	186	132.7	83.8	258	120.6	98	163	203.2	10	M12	25	47	8	M12	25	43.4
SE9	410.5	321.7	174.2	107.9	345	175	146	222.5	270	(16-1)	M16	30	65.9	16	M16	30	52
SE12	499.5	339.5	220	110.4	431	259	229	314.3	358	(20-1)	M16	30	69.4	18	M16	30	51
SE14	529.9	337.5	237.6	111	456.5	295	265	342.5	390	(24-1)	M16	30	69	18	M16	30	52
SE17	621.8	385.2	282.6	126	550.5	365.1	324	422.1	479.4	20	M16	32	79	20	M16	32	55
SE21	750.4	475	345	140	667.7	466.7	431.8	525.5	584.2	(36-1)	M20	40	85	36	M20	40	no
SE25	862.8	469	401.8	130	792	565	512	620	675	(36-1)	M20	40	87	36	M20	40	no

性能参数表 : PERFORMANCE PARAMETERS

型号 Model	输出扭矩 (MAX) kN.m Output Torque	倾覆力矩 (MAX) kN.m Tilting Moment Torque	轴向静载荷 kN Static Axial Load	径向静载荷 kN Static Radial Load	轴向动载荷 (MAX) kN.m Dynamic Axial Load	径向动载荷 (MAX) kN.m Dynamic Radial Load	保持力矩 (MAX) kN.m Holding Torque	减速比 Gear Ratio	精度等级 Tracking Precision	自锁 Self-locking Gears	重量 kg Weight
SE3	0.4	1.1	30	16.6	9.6	8.4	2	62:1	≤0.20°	Yes	14 kg
SE5	0.6	3	45	22	14.4	11.1	5.5	62:1	≤0.20°	Yes	13 kg
SE7	1.5	13.5	133	53	32	28	10.4	73:1	≤0.20°	Yes	23 kg
SE9	6.5	33.9	338	135	81	71	38.7	61:1	≤0.20°	Yes	50 kg
SE12	7.5	54.3	475	190	114	100	43	78:1	≤0.20°	Yes	65 kg
SE14	8	67.8	555	222	133	117	48	85:1	≤0.20°	Yes	70 kg
SE17	10	135.6	970	390	235	205	72.3	102:1	≤0.15°	Yes	105 kg
SE21	15	203	1598	640	385	335	105.8	125:1	≤0.15°	Yes	180 kg
SE25	18	271	2360	945	590	470	158.3	150:1	≤0.15°	Yes	218 kg